



## LED Highbays

V-TAC's new UFO and Linear High bays are designed for widespread illumination, efficiency, and resistance to harsh conditions. The UFO high-bays are supported by Meanwell drivers to boost their performance, are IP65 rated and have a sturdy body to ensure endurance, and have two options of beam angle to choose from, for even light distribution.

### Product Features

- Powerful led light source with a unique design
- Extensive options can replace all types of standard MH highbays
- Aluminium diffuser with multiple beam angle's to choose from 45° / 90° / 120°
- Shatter proof perspex lens
- high thermal conductivity, low luminous decay, pure Colours & no heavy shade
- The unique design of radiator fuses with the lamp box perfectly hence diffuses the heat conduction efficiently which reduces the temperature of inside lamp


### Applications

Perfect fit for industrial usage, warehouse & super markets, workshops, factories, warehouses, highway, toll stations, gas stations, malls, exhibition halls, stadiums & other vast areas.




UFO-High Lumen-Meanwell Driver  
100w VT-9107

SKU: 5588 - 6400K White 3800157622301



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Sensor Compatible:	Yes
Voltage/Frequency:	AC:100-240V,50/60Hz
Luminous Flux:	13000lm
LED Type:	SMD

CRI:	>70
PF:	>0.9
Beam Angle:	90°
Body Type:	Die Cast Aluminium


IP Rating:	IP65
Dimension:	280x165mm
Box Qty:	4 Pcs

**5 YEAR WARRANTY\***




UFO-High Lumen-Meanwell Driver  
100w VT-9117

SKU: 5586 - 6400K White 3800157622271  
3800157622288



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Sensor Compatible:	Yes
Voltage/Frequency:	AC:100-240V,50/60Hz
Luminous Flux:	13000lm
LED Type:	SMD

CRI:	>70
PF:	>0.9
Beam Angle:	120°
Body Type:	Die Cast Aluminium


IP Rating:	IP65
Dimension:	280x165mm
Box Qty:	4 Pcs

**5 YEAR WARRANTY\***




UFO-High Lumen-Meanwell Driver  
500w VT-9500

SKU: 5607 - 4000K Day White 3800157625050  
SKU: 5608 - 6400K White 3800157625067



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Sensor Compatible:	Yes
Voltage/Frequency:	AC:90-295V,50Hz
Luminous Flux:	65000lm
LED Type:	SMD

CRI:	>80
PF:	>0.9
Beam Angle:	120°
Body Type:	Die Cast Aluminium

IP Rating:	IP65
Dimension:	Ø360
Box Qty:	1 Pcs

**5 YEAR WARRANTY\***




Sensor Compatible:	Yes
Voltage/Frequency:	AC:220-240V,50Hz
Luminous Flux:	4000lm
LED Type:	SMD
CRI:	>70
PF:	>0.9
Beam Angle:	120°
Body Type:	Die Cast Aluminium
IP Rating:	IP44
Dimension:	Ø221x85mm
Box Qty:	4 Pcs

UFO-Highbay-120°

50w VT-9053

SKU: 5554 - 4500K Day White  
SKU: 5555 - 6400K White

3800157620895  
3800157620901





Sensor Compatible:	Yes
Voltage/Frequency:	AC:220-240V,50Hz
Luminous Flux:	4000lm
LED Type:	SMD
CRI:	>70
PF:	>0.9
Beam Angle:	120°
Body Type:	Die Cast Aluminium
IP Rating:	IP44
Dimension:	220x114mm
Box Qty:	8 Pcs

UFO-Highbay-120°

50w VT-9065-W

SKU: 5609 - 3000K Warm White  
SKU: 5610 - 4000K Day White  
SKU: 5611 - 6400K White

3800157626507  
3800157626514  
3800157626521




Sensor Compatible:	Yes
Voltage/Frequency:	AC:220-240V,50Hz
Luminous Flux:	8000lm
LED Type:	SMD
CRI:	>70
PF:	>0.9
Beam Angle:	120°
Body Type:	Die Cast Aluminium
IP Rating:	IP44
Dimension:	280x131mm
Box Qty:	2 Pcs

UFO-Highbay-120°

100w VT-9115-W

SKU: 5612 - 3000K Warm White

3800157626538




Sensor Compatible:	Yes
Voltage/Frequency:	AC:220-240V,50Hz
Luminous Flux:	4000lm
LED Type:	SMD
CRI:	>70
PF:	>0.9
Beam Angle:	120°
Body Type:	Die Cast Aluminium
IP Rating:	IP44
Dimension:	220x114mm
Box Qty:	8 Pcs

UFO-Highbay-120°

50w VT-9065

SKU: 5558 - 6400K White

3800157621953




Sensor Compatible:	Yes
Voltage/Frequency:	AC:220-240V,50Hz
Luminous Flux:	4000lm
LED Type:	SMD
CRI:	>70
PF:	>0.9
Beam Angle:	90°
Body Type:	Die Cast Aluminium
IP Rating:	IP44
Dimension:	220x114mm
Box Qty:	8 Pcs

UFO-Highbay-90°

50w VT-9055

SKU: 5560 - 6400K White

3800157621977





### Emergency Kit-Highbay 100w VT-599


SKU:8384

3800157639309



Box Qty.  
**6 Pcs**

Voltage/Frequency:	AC:220-240V,50/60Hz
IP Rating:	IP44
Load Voltage:	DC:40-50V
Emergency Duration:	180mins
Battery:	DC:11.1V 6600mAh, Li-ion
Charging Time:	24 Hours
LED Driver Output Current:	2A Max
Output Emergency Power:	20W
Tc Max:	65
Ambient Temperature:	-5 to +40

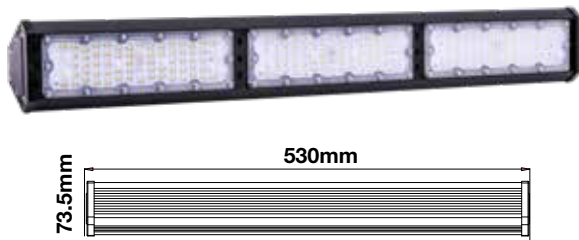

### LED Highbays 100w VT-9-109

**100° BEAM ANGLE**

**3 YEAR WARRANTY**

SKU: 589 - 4000K Day White  
SKU: 590 - 6000K White

3800157643146  
3800157643153

Sensor Compatible:	Yes
Voltage/Frequency:	AC:220-240V,50Hz
Luminous Flux:	9000lm
LED Type:	SMD
CRI:	>80

PF:	>0.9
Beam Angle:	100°
Body Type:	Aluminium
IP Rating:	IP54
Dimension:	530x103.5x73.5mm
Box Qty:	10 Pcs



### Linear Highbay 150w VT-9159



**100° BEAM ANGLE**

SKU: 56011 - 4000K Day White  
SKU: 56021 - 6000K White

3800157624923  
3800157624930

Sensor Compatible:	Yes
Voltage/Frequency:	AC:220-240V,50Hz
Luminous Flux:	13500lm
LED Type:	SMD
CRI:	>80

PF:	>0.9
Beam Angle:	100°
Body Type:	Die Cast Aluminium
IP Rating:	IP54
Dimension:	790X103.5X73.5mm
Box Qty:	1 Pcs

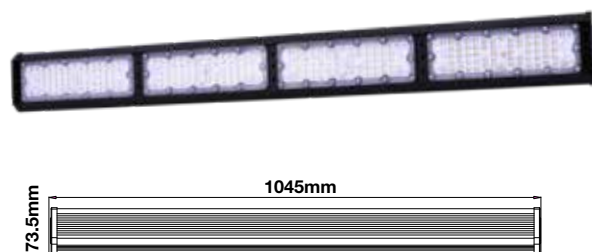

### Linear Highbay- 200w VT-9209

**100° BEAM ANGLE**

SKU: 56031 - 4000K Day White  
SKU: 56041 - 6000K White

3800157624947  
3800157624954

Sensor Compatible:	Yes
Voltage/Frequency:	AC:220-240V,50Hz
Luminous Flux:	18000lm
LED Type:	SMD
CRI:	>80

PF:	>0.9
Beam Angle:	100°
Body Type:	Die Cast Aluminium
IP Rating:	IP54
Dimension:	1045x103.5x73.5mm
Box Qty:	1 Pcs