



CE LVD TEST REPORT

For
LED WALL LIGHT

Model No.: VT-848, VT-846, VT-815, VT-814, VT-2502, VT-2503, VT-2544, VT-11117, VT-11112, VT-11107, VT-11120, VT-1173, VT-1176, VT-1178

Applicant : V-TAC EXPORTS LIMITED
ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD
CENTRAL, CENTRAL, HONGKONG

Manufacturer : V-TAC EXPORTS LIMITED
ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD
CENTRAL, CENTRAL, HONGKONG

Issued By : Global-Standard Testing Service Co., Ltd.
Room 1505, Building B, Chuangxin Plaza, Pingshan Avenue,
Pingshan District, Shenzhen, China

Tel : +86 755 33863999

Email : Market@gstslab.com *

Report Number : GST.220415.A302S-R1


Issued Date : June 19, 2023

Date of Report : June 19, 2023

Note:

1. The test data and result is based on the tested sample only.
2. Please verify information in the report on GST web: www.gstslab.com through report number.
3. All rights reserve, the pirate edition investigates necessarily! This report shall not be reproduced unless under the authority of Global-Standard Testing Service Co., Ltd

TEST REPORT
EN 60598-2-1
Luminaires
Part 2: Particular requirements
Section 1: Fixed general purpose luminaires

Report reference No.:	GST.220415.A302S-R1
Testing laboratory	Global-Standard Testing Service Co., Ltd.
Location.....:	Room 1505, Building B, Chuangxin Plaza, Pingshan Avenue, Pingshan District, Shenzhen, China
Applicant.....:	V-TAC EXPORTS LIMITED
Address:.....:	ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL, CENTRAL, HONGKONG
Manufacturer :.....:	V-TAC EXPORTS LIMITED
Address:.....:	ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL, CENTRAL, HONGKONG
Standards.....:	EN IEC 60598-1:2021 EN IEC 60598-2-1:2021
Procedure deviation.....:	N/A
Non-standard test method.....:	N/A
Type of test equipment	LED WALL LIGHT
Trade mark.....:	 Meaningful Innovation.
Model/Type designation.....:	VT-848, VT-846, VT-815, VT-814, VT-2502, VT-2503, VT-2544, VT-11117, VT-11112, VT-11107, VT-11120, VT-1173, VT-1176, VT-1178
Rating.....:	AC 220-240V, 50Hz, Max.0.8A, 10W
TRF originator.....:	Global-Standard Testing Service Co., Ltd.
Copyright blank test report:	Global-Standard Testing Service Co., Ltd.
Test item particulars:	See below
Operating Condition	Continuous
Tested for IT power systems	N/A
IT testing, phase-phase voltage (V)	N/A
Class of equipment	Class I equipment
Protection against ingress of water	IP20


Possible test case verdicts :

test case does not apply to the test object	N(/A.)
test object does meet the requirement	P(ass)
test object does not meet the requirement	F(ail)

Name and address of the testing laboratory :

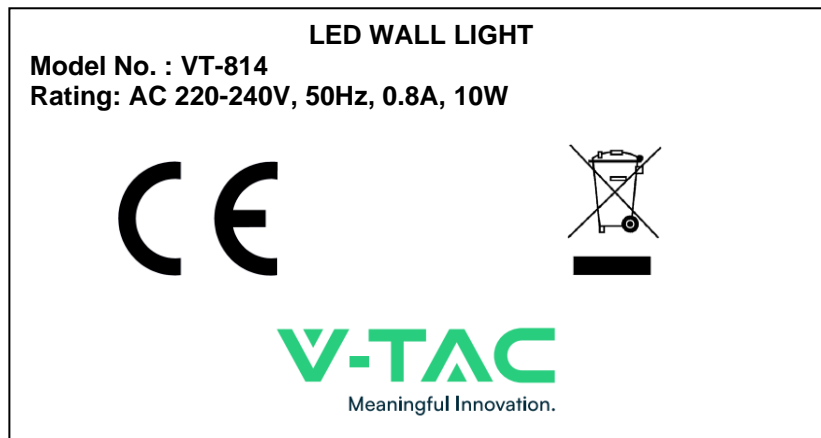
Global-Standard Testing Service Co., Ltd.
 Room 1505, Building B, Chuangxin Plaza, Pingshan Avenue,
 Pingshan District, Shenzhen, China

Prepared by : John Huang Signature June 16, 2023 Date
 John.Huang/Senior Project Engineer Name/title

Approved by :  Signature June 19, 2023 Date
 Nico He / Manager Name/title

<p>General remarks:</p> <p>Clause number between brackets refer to clauses in IEC 60598-1</p> <p>"(see remark #)" refers to a remark appended to the report.</p> <p>"(see appended table)" refers to a table appended to the report.</p> <p>Throughout this report a comma is used as the decimal separator.</p> <p>The test results presented in this report relate only to the object tested.</p> <p>This report shall not be reproduced except in full without the written approval of the testing laboratory.</p>	<p>Attachment with:</p> <p>1) Photo documentation</p>
<p>Summary of testing:</p> <p>The submitted samples are also fulfilled the requirements of specified standard of:</p> <ol style="list-style-type: none"> 1) EN IEC 60598-2-1:2021 used in conjunction with EN IEC 60598-1:2021. 2) The LED modules complied with the requirements of standard EN 62031:2020. 3) Requirement of EMF have been considered according to EN 62493:2015. <p>Total 4 models, All models are the same except color, appearance and driver output. Model VT-814 was subjected to do full test, other model were subjected to do deviation test.</p> <p>Modification 1: This report is based on report GST.220415.A302S. It added new models and upgraded standard, new models have similar electrical and mechanical structure with original report models, no test for this revision.</p>	

Label





Location: Attached on the base surface of product body and visible during installation

Note:

- Due to similarity of the labels, only above label was listed.
- The above copy of marking plate as an example, All the other models will have the same marking plate except the model name and input rating only and other parameter
- The above markings are the minimum requirements required by the safety standard. For the final productions samples, the additional markings which do not give rise to misunderstanding may be added.

Remark on above marking:

- 1, The height of letters and numerals shall be not less than 2 mm.
- 2, The height of graphical symbols except "" shall not be less than 5 mm;
- 3, The height of graphical symbols "" shall not be less than 7 mm.

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.4 (0)	GENERAL TEST REQUIREMENTS		P
1.4 (0.3)	More sections applicable..... :	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> Section/s:	-
1.4 (0.5)	Components	(see Annex 1)	-
1.4 (0.7)	Information for luminaire design in light sources standards		-
1.4 (0.7.2)	Light source safety standard	IEC/EN IEC 62031	-
	Luminaire design in the light source safety standard		P

1.5 (2)	CLASSIFICATION OF LUMINAIRES		P
1.5 (2.2)	Type of protection	Class I	P
1.5 (2.3)	Degree of protection..... :	IP20	-
1.5 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces..... :	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	-
1.5 (2.5)	Luminaire for normal use	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	-
	Luminaire for rough service	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	-

1.6 (3)	MARKING		P
1.6 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
1.6 (3.3)	Additional information		P
	Language of instructions		P
1.6 (3.3.1)	Combination luminaires		P
1.6 (3.3.2)	Nominal frequency in Hz		P
1.6 (3.3.3)	Operating temperature		N/A
1.6 (3.3.5)	Wiring diagram		N/A
1.6 (3.3.6)	Special conditions		N/A
1.6 (3.3.7)	Metal halide lamp luminaire – warning		N/A
1.6 (3.3.8)	Limitation for semi-luminaires		N/A
1.6 (3.3.9)	Power factor and supply current		N/A
1.6 (3.3.10)	Suitability for use indoors		N/A
1.6 (3.3.11)	Luminaires with remote control		N/A
1.6 (3.3.12)	Clip-mounted luminaire – warning		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.6 (3.3.13)	Specifications of protective shields		N/A
1.6 (3.3.14)	Symbol for nature of supply		P
1.6 (3.3.15)	Rated current of socket outlet		N/A
1.6 (3.3.16)	Rough service luminaire		N/A
1.6 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments		N/A
1.6 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
1.6 (3.3.19)	Protective conductor current in instruction if applicable		N/A
1.6 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N/A
1.6 (3.3.21)	Non replaceable and non-user replaceable light sources information provided	Non-user replaceable	P
1.6 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
1.6 (3.3.23)	Luminaires without control gear provided with necessary information for selection of appropriate component		N/A
1.6 (3.3.24)	If not supplied with terminal block, information on the packaging		N/A
1.6 (3.3.25)	Luminaires employing light sources emitting UV on mains wiring, information provided		N/A
1.6 (3.3.26)	Wall mounted luminaire using external flexible cable or cord longer than 0.3 m, information provided		N/A
1.6 (3.4)	Test with water		P
	Test with hexane		P
	Legible after test		P
	Label attached		P

1.7 (4)	CONSTRUCTION		P
1.7 (4.2)	Components replaceable without difficulty		P
1.7 (4.3)	Wireways smooth and free from sharp edges		P
1.7 (4.4)	Lamp holders		N/A
1.7 (4.4.1)	Integral lamp holder		N/A
1.7 (4.4.2)	Wiring connection		N/A
1.7 (4.4.3)	Lamp holder for end-to-end mounting		N/A
1.7 (4.4.4)	Positioning		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- pressure test (N)		—
	After test the lamp holder comply with relevant standard sheets and show no damage		N/A
	After test on single-capped lamp holder the lamp holder has not moved from its position and show no permanent deformation		N/A
	- bending test (N)		—
	After test the lamp holder has not moved from its position and show no permanent deformation		N/A
1.7 (4.4.5)	Peak pulse voltage		N/A
1.7 (4.4.6)	Centre contact		N/A
1.7 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
1.7 (4.4.8)	Lamp connectors		N/A
1.7 (4.4.9)	Caps and bases correctly used		N/A
1.7 (4.4.10)	Light source for lamp holder or connection according IEC 60061 not connected another way		N/A
1.7 (4.5)	Starter holders		N/A
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
1.7 (4.6)	Terminal blocks		N/A
	Tails		N/A
	Unsecured blocks		N/A
1.7 (4.7)	Terminals and supply connections		N/A
1.7 (4.7.1)	Contact to metal parts		N/A
1.7 (4.7.2)	Test 8 mm live conductor		N/A
	Test 8 mm earth conductor		N/A
1.7 (4.7.3)	Terminals for supply conductors		N/A
1.7 (4.7.3.1)	Welded method and material		N/A
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.6.2		N/A
	- electrical test according to 15.6.3		N/A
	- heat test according to 15.6.3.2.3 and 15.6.3.2.4		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.7.4)	Terminals other than supply connection		N/A
1.7 (4.7.5)	Heat-resistant wiring/sleeves		N/A
1.7 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A
1.7 (4.8)	Switches		N/A
	- adequate rating		N/A
	- adequate fixing		N/A
	- polarized supply		N/A
	- compliance with IEC 61058-1 for electronic switches		N/A
1.7 (4.9)	Insulating lining and sleeves		N/A
1.7 (4.9.1)	Retainment		N/A
	Method of fixing..... :	By structure	N/A
1.7 (4.9.2)	Insulated linings and sleeves:		N/A
	Resistant to a temperature > 20 °C to the wire temperature or		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C)..... :		N/A
1.7 (4.10)	Double or reinforced insulation		N/A
1.7 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		N/AP
	Safe installation fixed luminaires		N/A
	Capacitors and switches		N/A
1.7 (4.10.2)	Assembly gaps:		N/A
	- not coincidental		N/A
	- no straight access with test probe		N/A
1.7 (4.10.3)	Retainment of insulation:		N/A
	- fixed		N/A
	- unable to be replaced; luminaire inoperative		N/A
	- sleeves retained in position		N/A
	- lining in lamp holder		N/A
1.7 (4.10.4)	Protective impedance device		N/A
	Basic and supplementary insulation bridged by resistor(s) or appropriate capacitor		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Double or reinforced insulation bridged by at least two separate resistors in series or appropriate capacitor(s)		N/A
	Capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.2 of IEC 60065		N/A
1.7 (4.11)	Electrical connections and current-carrying parts		P
1.7 (4.11.1)	Contact pressure		P
1.7 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
1.7 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
1.7 (4.11.4)	Material of current-carrying parts		P
1.7 (4.11.5)	No contact to wood or mounting surface		P
1.7 (4.11.6)	Electro-mechanical contact systems		N/A
1.7 (4.12)	Screws and connections (mechanical) and glands		P
1.7 (4.12.1)	Screws not made of soft metal		P
	Screws of insulating material		P
	Torque test: torque (Nm); part..... :		P
	Torque test: torque (Nm); part..... :		N/A
	Torque test: torque (Nm); part..... :		N/A
1.7 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
1.7 (4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm)		N/A
	- lamp holder; torque (Nm)		N/A
	- push-button switches; torque 0,8 Nm		N/A
1.7 (4.12.5)	Screwed glands; force (Nm)..... :		N/A
1.7 (4.13)	Mechanical strength		P
1.7 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm)		N/A
	- other parts; energy (Nm)..... :		P
	1) live parts		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	2) linings		N/A
	3) protection		P
	4) covers		P
1.7 (4.13.2)	Metal parts have adequate mechanical strength		P
1.7 (4.13.3)	Straight test finger		P
1.7 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
1.7 (4.13.6)	Tumbling barrel		N/A
1.7 (4.14)	Suspensions, fixings and means of adjusting		P
1.7 (4.14.1)	Mechanical load:		P
	A) four times the weight		P
	B) torque 2,5 Nm		N/A
	C) bracket arm; bending moment (Nm)		N/A
	D) load track-mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm)		N/A
	Metal rod. diameter (mm)		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
1.7 (4.14.2)	Load to flexible cables		N/A
	Mass (kg)		—
	Stress in conductors (N/mm ²)		N/A
	Mass (kg) of semi-luminaire		N/A
	Bending moment (Nm) of semi-luminaire		N/A
1.7 (4.14.3)	Adjusting devices:		P
	- flexing test; number of cycles.....	1500 cycles	P
	- strands broken	<50%	P
	- electric strength test afterwards		P

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
1.7 (4.14.5)	Guide pulleys		N/A
1.7 (4.14.6)	Strain on socket-outlets		N/A
1.7 (4.15)	Flammable materials		P
	- glow-wire test 650°C	See Test Table 1.15 (13.3.2)	P
	- spacing ≥ 30 mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		P
	- thermal protection		N/A
	- electronic circuits exempted		N/A
1.7 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
1.7 (4.16)	Luminaires for mounting on normally flammable surfaces		P
	No lamp control gear	(compliance with Section 12)	P
	Provided with adaptor for a track meet the requirements for direct mounting on normally flammable surfaces		N/A
1.7 (4.16.1)	Lamp control gear spacing:		P
	- spacing 35 mm		P
	- spacing 10 mm		P
1.7 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
1.7 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N/A
1.7 (4.17)	Drain holes		N/A
	Clearance at least 5 mm		N/A
1.7 (4.18)	Resistance to corrosion		N/A
1.7 (4.18.1)	- rust-resistance		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.18.2)	- season cracking in copper		N/A
1.7 (4.18.3)	- corrosion of aluminium		N/A
1.7 (4.19)	Igniters compatible with ballast		N/A
1.7 (4.20)	Rough service vibration		N/A
1.7 (4.21)	Protective shield		N/A
1.7 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A
	Shield of glass if tungsten halogen lamps		N/A
1.7 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
1.7 (4.21.3)	No direct path		N/A
1.7 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment :	See Test Table 1.15 (13.3.2)	N/A
1.7 (4.22)	Attachments to lamps not cause overheating or damage		N/A
1.7 (4.23)	Semi-luminaires comply Class II		N/A
1.7 (4.24)	Photobiological hazards		N/A
1.7 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N/A
1.7 (4.24.2)	Retinal blue light hazard		N/A
	Class of risk group assessed according to IEC/TR 62778		—
	Luminaires with E_{thr} :		N/A
	a) Fixed luminaires		N/A
	- distance x m, borderline between RG1 and RG2 .. :		N/A
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires		N/A
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A
1.7 (4.25)	Mechanical hazard		P
	No sharp point or edges		P
1.7 (4.26)	Short-circuit protection		P
1.7 (4.26.1)	Adequate means of uninsulated accessible SELV / PELV parts		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.26.2)	Short-circuit test with test chain according 4.26.3:		N/A
	Supply source ES1 PSE		N/A
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
1.7 (4.27)	Terminal blocks with integrated screwless protective earthing contacts		N/A
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Pull test of mechanical connection (50 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Voltage drop test, resistance < 0,05 Ω		N/A
1.7 (4.28)	Fixing of thermal sensing control		N/A
	Not plug-in or easily replaceable type		N/A
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material (°C) :		—
	100 cycles between t min and t max		N/A
	Temperature sensing control still in position		N/A
1.7 (4.29)	Luminaires with non-replaceable light source		P
	Not possible to replace light source		P
	Live part not accessible after parts have been opened by hand or tools		P
1.7 (4.30)	Luminaires with non-user replaceable light source		N/A
	If protective cover provide protection against electric shock and marked with “caution, electric shock risk” symbol:		N/A
	At least one fixing means requiring use of tool		N/A
1.7 (4.31)	Insulation between circuits		P
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
1.7 (4.31.1)	SELV or PELV circuits		P
	Used SELV/PELV source		P
	Voltage \leq ELV		N/A
	Insulating of SELV/PELV circuits from LV supply		N/A
	Insulating of SELV/PELV circuits from other non SELV/PELV circuits		N/A
	Insulating of SELV/PELV circuits from FELV		N/A
	Insulating of SELV/PELV circuits from other SELV/PELV circuits		N/A
	SELV/PELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Plugs and socket-outlets does not have protective conductor contact		N/A
1.7 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A
	Voltage \leq ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets does not have protective conductor contact		N/A
1.7 (4.31.3)	Other circuits		N/A
	Other circuits insulated from accessible parts according Table X.1		N/A
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- conductive parts are connected together		N/A
	- test according 7.2.3		N/A
	- conductive part not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A
1.7 (4.32)	Overvoltage protective devices		N/A
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		N/A
	- only in fixed luminaires		N/A
	- only connected to protective earth		N/A
1.6 (4.33)	Luminaire powered via information technology communication cabling		N/A
	Requirements for Class III luminaire		N/A
	Rated voltage within the range of ES1 and does not exceed maximum voltage of used connector		N/A
	Luminaire does not create any hazard from overvoltage	(see Annex 2)	N/A
1.6 (4.34)	Electromagnetic fields (EMF)		P
	No harmful electromagnetic fields		P
1.6 (4.35)	Protection against moving fan blades		N/A
	Test with a standard test finger		N/A
	Test with test probe acc. to Figure 13 (IEC 61032) for portable luminaire		N/A
	Blades rounded with radius ≥ 0.5 mm and:		N/A
	-hardness less than D60 Shore		N/A
	-peripheral speed less than 15 m/s		N/A
	-input power of fan ≤ 2 W at rated voltage		N/A
1.6 (4.36)	Track-mounted luminaires		N/A
	Test in accordance with Annex A of IEC60570:2003/AMD2:2019		N/A
1.8 (11)	CREEPAGE DISTANCES AND CLEARANCES		P
1.8(11.2.1)	Impulse withstand category (Normal category II)	Category II <input checked="" type="checkbox"/> Category III <input type="checkbox"/>	-

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Category III according Annex U		P
	Protected against pollution, reduced creepage and clearance according Annex P of IEC 61347-1		P
1.8(11.2.2)	Creepage distances for frequency up to 30 kHz	See Test Table 1.7 (11.2) I	P
	Creepage distances for frequency over 30 kHz:		P
	- Controlgear marked with \hat{U}_{OUT} and $f_{U_{OUT}}$ according IEC 61347-1, clause 7.1, item w	See Test Table 1.7 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 1.7 (11.2) II	N/A
1.8(11.2.3)	Clearances for frequency up to 30 kHz	See Test Table 1.7 (11.2) I	P
	Clearances distances for frequency over 30 kHz:		N/A
	- Controlgear marked with U_P	See Test Table 1.7 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 1.7 (11.2) II	N/A
1.9 (7)	PROVISION FOR EARTHING		P
1.9 (7.2.1 + 7.2.3)	Accessible metal parts		P
	Metal parts in contact with supporting surface		P
	Resistance < 0,5 Ω :		P
	Self-tapping screws used		P
	Thread-forming screws		P
	Thread-forming screw used in a groove		P
	Protective earth makes contact first		P
	Terminal blocks with integrated screwless protective earthing contacts tested according Annex V		P
	Protective earthing of the luminaire not via built-in control gear		P
1.9 (7.2.2 + 7.2.3)	Protective earth continuity in joints, etc.		N/A
1.9 (7.2.4)	Locking of clamping means		N/A
	Compliance with 4.7.3		N/A
1.9 (7.2.5)	Protective earth terminal integral part of connector socket		N/A
1.9 (7.2.6)	Protective earth terminal adjacent to mains terminals		N/A
1.9 (7.2.7)	Electrolytic corrosion of the protective earth terminal		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.9 (7.2.8)	Material of protective earth terminal		N/A
	Contact surface bare metal		N/A
1.9 (7.2.10)	Class II luminaire for looping-in		N/A
	Double or reinforced insulation to functional earth		N/A
1.9 (7.2.11)	Protective earthing core coloured green-yellow		N/A
	Length of earth conductor		N/A
1.9 (7.2.12)	PELV circuit connected to protective earth for functional purpose		N/A

1.10 (14)	SCREW TERMINALS		N/A
	Separately approved; component list	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 3)	N/A

1.10 (15)	SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS		N/A
	Separately approved; component list.....:	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 4)	N/A

1.11 (5)	EXTERNAL AND INTERNAL WIRING		P
1.11 (5.2)	Supply connection and external wiring		P
1.11 (5.2.1)	Means of connection		P
	Outdoor luminaire has not PVC insulated external wiring if not Class III or SELV/PELV circuits ≤ 25 V AC/60 V DC/25 V peak interrupted DC voltage with frequency 10Hz -200 Hz or protected from outdoor environment		N/A
1.11 (5.2.2)	Type of cable.....:		P
	Nominal cross-sectional area (mm ²)		P
	Cables equal to IEC 60227 or IEC 60245		N/A
1.11 (5.2.3)	Type of attachment, X, Y or Z	Type Y	P
1.11 (5.2.5)	Type Z not connected to screws		P
1.11 (5.2.6)	Cable entries:		P
	- suitable for introduction		P
	- adequate degree of protection		P
1.11 (5.2.7)	Cable entries through rigid material have rounded edges		P

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.11 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		N/A
1.11 (5.2.9)	Locking of screwed bushings		N/A
1.11 (5.2.10)	Cord anchorage:		N/A
	- covering protected from abrasion		N/A
	- clear how to be effective		N/A
	- no mechanical or thermal stress		N/A
	- no tying of cables into knots etc.		N/A
	- insulating material or lining		N/A
1.11 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
1.11 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment		P
1.11 (5.2.10.3)	Tests:		P
	- impossible to push cable; unsafe		P
	- pull test: 25 times; pull (N) : 30 N		P
	- torque test: torque (Nm) :		N/A
	- displacement ≤ 2 mm		N/A
	- no movement of conductors		N/A
	- no damage of cable or cord		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- function independent of electrical connection		N/A
1.11 (5.2.10.4)	Luminaire with/ designed for use with supply cord with maximum current of 2A:		N/A
	- Ordinary Class III luminaire supplied with SELV ≤ 25V RMS/60V DC		P
	- Ordinary Class III luminaire supplied with PELV ≤ 12V RMS/30V DC		N/A
	- Other than ordinary Class III luminaire supplied with voltage ≤ 12V RMS/30V DC		N/A
	Pull test of 30N		P
1.11 (5.2.11)	External wiring passing into luminaire		N/A
1.11 (5.2.12)	Looping-in terminals		N/A
1.11 (5.2.13)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		N/A
1.11 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A
1.11 (5.2.15)	Connectors for Class III luminaires (IEC 60603 or IEC 62680)		N/A
1.11 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A
	Appliance inlet or connector systems (IEC 61984)		N/A
1.11 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
1.11 (5.2.18)	Used plug in accordance with		N/A
	- IEC 60083		N/A
	- other standard		N/A
1.11 (5.3)	Internal wiring		P
1.11 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		N/A
	- not delivered/ mounting instruction		N/A

EN 60598-2-1

Clause	Requirement + Test	Result - Remark	Verdict
	- factory assembled		N/A
	- socket outlet loaded (A)		N/A
	- temperatures.....	(see Annex 2)	N/A
	Green-yellow for protective earth only		N/A
1.11 (5.3.1.1)	Internal wiring connected directly to fixed wiring		N/A
	Cross-sectional area (mm ²).....		N/A
	Insulation thickness (mm)		N/A
	Extra insulation added where necessary		N/A
1.11 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		P
	Cross-sectional area (mm ²).....		P
1.11 (5.3.1.3)	Double or reinforced insulation for class II		N/A
1.11 (5.3.1.4)	Conductors without insulation		N/A
1.11 (5.3.1.5)	SELV/PELV current-carrying parts		P
1.11 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
1.11 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		N/A
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		P
1.11 (5.3.3)	Insulating bushings:		N/A
	- suitable fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- cables with protective sheath		N/A
1.11 (5.3.4)	Joints and junctions effectively insulated		N/A
1.11 (5.3.5)	Strain on internal wiring		N/A
1.11 (5.3.6)	Wire carriers		N/A
1.11 (5.3.7)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		P

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.11 (5.4)	Test to determine suitability of conductors having a reduced cross-sectional area		P
	Under test the temperature of the luminaire wiring insulation not exceed the limits stated in Table 12.2	(see Annex 2)	P
	No damage to luminaire wiring after test		P
1.12 (8)	PROTECTION AGAINST ELECTRIC SHOCK		P
1.12 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		P
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		P
	Lamp and starter holders in portable and adjustable luminaires comply with double or reinforced insulation requirements		P
	Basic insulation only accessible under lamp or starter replacement		N/A
	Protection in any position		P
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		N/A
	Double-ended high-pressure discharge lamp		N/A
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
1.12 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
1.12 (8.2.3.a)	Class II luminaire:		N/A
	- basic insulated metal parts not accessible during starter or lamp replacement		N/A
	- basic insulation not accessible other than during starter or lamp replacement		N/A
	- glass protective shields not used as supplementary insulation		N/A
1.12 (8.2.3.b)	BC lamp holder of metal in class I luminaires shall be connected to protective earth		N/A
1.12 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V)..... :		N/A
	- interrupted DC voltage (V)		N/A
	- touch current if applicable (mA)		N/A
	One conductive part insulated if required		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V)..... :		N/A
	- interrupted DC voltage (V)		N/A
	Class III luminaire only for connection to SELV		N/A
	Class III luminaire not provided with means for protective earthing		N/A
1.12 (8.2.3.d)	PELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V)..... :		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V)..... :		N/A
	One pole insulated if required		N/A
1.12 (8.2.4)	Portable luminaire has protection independent of supporting surface		N/A
1.12 (8.2.5)	Compliance with the standard test finger or relevant probe		N/A
1.12 (8.2.6)	Covers reliably secured		N/A
1.12 (8.2.7)	Luminaire other than below with capacitor > 0,5 μ F not exceed 50 V 1 min after disconnection		N/A
	Portable luminaire with capacitor > 0,1 μ F (0.25) not exceed 34 V 1 s after disconnection		N/A
	Other luminaires with capacitor > 0,1 μ F (0.25) with plug and track adaptors not exceed 60 V 5 s after disconnection		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.13 (12)	ENDURANCE TEST AND THERMAL TEST		P
1.13 (-)	If IP > IP 20 relevant test of (12.4), (12.5), (12.6) and (12.7) after (9.2) before (9.3) as specified in 1.14		-
1.13 (12.2)	Selection of lamps and ballasts		-
	Lamp used according Annex B	(Lamp used see Annex 2)	-
	Control gear if separate and not supplied	(Control gear used see Annex 2)	-
1.13 (12.3)	Endurance test		P
	a) mounting-position	Wall mounting, as normal used	-
	b) test temperature (°C)	35	-
	c) total duration (h)	240	-
	d) supply voltage (V)	264 VAC	-
	d) if not equipped with control gear, constant voltage/current (V) or (A)	-	-
1.13 (12.3.1d)	d) Class III luminaires powered via information technology communication cable:		N/A
	- voltage under normal operation (V).....		-
	- voltage under abnormal operation (V).....		-
	e) luminaire ceases to operate		-
	f) luminaire with constant light output function		N/A
1.13 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		P
1.13 (12.4)	Thermal test (normal operation)	(see Annex 2)	P
1.13 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	P
1.13 (12.6)	Thermal test (failed lamp control gear condition):		N/A
1.13 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A)		-
	- case of abnormal conditions		-
	- electronic lamp control gear		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- measured winding temperature (°C): at 1,1 Un :		-
	- measured mounting surface temperature (°C) at 1,1 Un		N/A
	- calculated mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A
1.13 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions		-
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A
1.13 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N/A
1.13 (12.7.1)	Luminaire without temperature sensing control		N/A
1.13 (12.7.1.1)	Luminaire with fluorescent lamp ≤ 70W		N/A
	Test method 12.7.1.1 or Annex W		-
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions		-
	- Ballast failure at supply voltage (V)		-
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
	Test according to Annex W:		N/A
	- case of abnormal conditions		-
	- measured winding temperature (°C): at 1,1 Un		-
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un		-
	- calculated temperature of fixing point/exposed part (°C)		-
	Ball-pressure test	See Test Table 1.15 (13.2.1)	N/A
1.13 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA		N/A
	- case of abnormal conditions		-

EN 60598-2-1

Clause	Requirement + Test	Result - Remark	Verdict
	- measured winding temperature (°C): at 1,1 Un :		–
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un :		–
	- calculated temperature of fixing point/exposed part (°C) :		–
	Ball-pressure test :	See Test Table 1.15 (13.2.1)	N/A
1.13 (12.7.1.3)	Luminaire with short circuit proof transformers ≤ 10 VA		N/A
	- case of abnormal conditions :		–
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
1.13 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link :	Yes <input type="checkbox"/> No <input type="checkbox"/>	–
	- manual reset cut-out :	Yes <input type="checkbox"/> No <input type="checkbox"/>	–
	- auto reset cut-out :	Yes <input type="checkbox"/> No <input type="checkbox"/>	–
	- case of abnormal conditions :		–
	- highest measured temperature of fixing point/exposed part (°C): :		–
	Ball-pressure test: :	See Test Table 1.15 (13.2.1)	N/A

1.14 (9)	RESISTANCE TO DUST AND MOISTURE		P
1.14 (-)	If IP > IP 20 the order of tests as specified in clause 1.12		N/A
1.14 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP :	IP20	–
	- mounting position during test :		–
	- fixing screws tightened; torque (Nm) :	--	–
	- tests according to clauses :	9.2.0	–
	- electric strength test afterwards		P
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		N/A
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		N/A
	c.1) For luminaires without drain holes – no water entry		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	c.2) For luminaires with drain holes – no hazardous water entry		N/A
	d) no water in watertight, pressure watertight, high pressure and temperature water jet-proof or high pressure and cold water jet-proof luminaire		N/A
	e) no contact with live parts (IP 2X)		P
	e) no entry into enclosure (IP 3X and IP 4X)		N/A
	e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)		N/A
	f) no trace of water on part of lamp requiring protection from splashing water		N/A
	g) no damage of protective shield or glass envelope		N/A
1.14 (9.3)	Humidity test 48 h	25 °C; 93% RH	P

1.15 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		P
1.15 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø		–
	Insulation resistance (MΩ):		P
	SELV/PELV:		P
	- between current-carrying parts of different polarity:		P
	- between current-carrying parts and mounting surface.....		P
	- between current-carrying parts and metal parts of the luminaire		P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts.....		P
	- Insulation bushings as described in Section 5		P
	Other than SELV/PELV:		P
	- between live parts of different polarity		P
	- between live parts and mounting surface		P
	- between live parts and metal parts		P
	- between live parts of different polarity through action of a switch.....		N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
1.15 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A
	Test voltage (V):		N/A
	SELV/PELV:		N/A
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface..... :		N/A
	- between current-carrying parts and metal parts of the luminaire :		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
	Other than SELV/PELV:		P
	- between live parts of different polarity :	1480V	P
	- between live parts and mounting surface :	1480V	P
	- between live parts and metal parts :	1480V	P
	- between live parts of different polarity through action of a switch..... :		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
1.15 (10.3)	Touch current (mA)..... :	0.05mA	P
	Protective conductor current (mA)..... :		N/A
1.16 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
1.16 (13.2.1)	Ball-pressure test..... :	See Test Table 1.16 (13.2.1)	N/A

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.16 (13.3.1)	Needle-flame test (10 s).....:	See Test Table 1.16 (13.3.1)	P
1.16 (13.3.2)	Glow-wire test (650°C).....:	See Test Table 1.16 (13.3.2)	P
1.16 (13.4)	Proof tracking test (IEC 60112).....:	See Test Table 1.16 (13.4)	N/A

1.8 (11.2)	TABLE I: Creepage distances and clearances						P
	Minimum distances (mm) for a.c. up to 30 kHz sinusoidal voltages						P
	Applicable part of IEC 60598-1 Table 11.1.A*, 11.1.B* and 11.2*						P
	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:	-B	-4.05	1.5	11.1	6.2	2.5	11.1
Working voltage (V).....:	220V-240V						-
PTI.....:	< 600 <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/>						-
Pulse voltage or U_P if applicable (kV).....:	-						-
Supplementary information: Class II luminaires							

** Insulation type: B – Basic; S – Supplementary; R – Reinforced. See also IEC 60598-1 Annex M.

1.8 (11.2)	TABLE II: Creepage distances and clearances						N/A
	Minimum distances (mm) for a.c. higher than 30 kHz sinusoidal voltages						
	Applicable part of IEC 61347-1 Table 7 and 8* or IEC 60664-4 Table 1 and 2						
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:							
Working voltage (V).....:							-
Frequency if applicable (kHz).....:							-
PTI.....:	<input type="checkbox"/> < 600 <input type="checkbox"/> ≥ 600						-
Peak value of the working voltage \hat{U}_{out} if applicable (kV).....:							-
Supplementary information:							
Distance 2:							
Working voltage (V).....:							-
Frequency if applicable (kHz).....:							-
PTI.....:	<input type="checkbox"/> < 600 <input type="checkbox"/> ≥ 600						-

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

Peak value of the working voltage \hat{U}_{out} if applicable (kV)			-
--	--	--	---

Supplementary information:

Distance 3:							
-------------	--	--	--	--	--	--	--

Working voltage (V).....			-
--------------------------	--	--	---

Frequency if applicable (kHz).....			-
------------------------------------	--	--	---

PTI.....	<input type="checkbox"/> < 600	<input type="checkbox"/> ≥ 600	-
----------	--------------------------------	--------------------------------	---

Peak value of the working voltage \hat{U}_{out} if applicable (kV)			-
--	--	--	---

Supplementary information:

** Insulation type: B – Basic; S – Supplementary; R – Reinforced.

1.16 (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics	N/A
----------------------	--	------------

Allowed impression diameter (mm)	2	-
--	---	---

Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)

Supplementary information:

1.16 (13.3.1)	TABLE: Needle-flame test	P
----------------------	---------------------------------	----------

Object/ Part No./ Material	Manufacturer / trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Diffuser	-	10	No	1	P

Supplementary information:

1.16 (13.3.2)	TABLE: Resistance to heat and fire - Glow wire tests	P
----------------------	---	----------

Object/ Part No./ Material	Manufacturer/ trademark	Glow wire test (°C)					Verdict
		650		750		850	
		te	ti	te	ti		
↓Diffuser	-	0	0	-	-	-	P

Ignition of the specified layer placed underneath the test specimen (Yes/No).....	-
---	---

Supplementary information:

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.16 (13.4)		TABLE: Proof tracking test		N/A
Test voltage PTI		175 V		-
Object/ Part No./ Material	Manufacturer / trademark	Withstand 50 drops without failure on three places or on three specimens		Verdict
Supplementary information:				

ANNEX 1		TABLE: Critical components information					P
Object / part No.	Code	Manufacturer / trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾	
LED PCB	B	Huizhou HongQi Electronic Technology Co. Ltd	HQ-D	V-0; 130°C	EN 60598-1; EN 60598-2-1	Tested with appliance & UL	
Driver	B	SHIEGER	XG-012301A	SELV Input: 220-240V, 50/60Hz, 0.09A Max Output: 24-62V, 300mA.	EN 61347-1; EN 61.47-2-13	CB	
LED	C	SHENZHEN LEPOWER OPTO ELECTRONIC S CORP., LTD	LY-WE180406WH 20H	VF= 10-12 V; IF= 460 mA	IEC/ EN 62031	Tested with appliance	
Diffuser	C	Trinseo (Hong Kong) LTD	EMERGE PC 8830-(m) LT(f1)	Measured min.1.0mm thick.	EN 60598-1; EN 60598-2-1	Tested with appliance & UL	
Ouput wire	B	GUANGDONG DONGJU WIRE & CABLE CO LTD	2468	22 AWG; 300 V; 80°C	EN 60598-1; EN 60598-2-1	Tested with appliance & UL	

Supplementary information:

¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.

The codes above have the following meaning:

- A - The component is replaceable with another one, also certified, with equivalent characteristics
- B - The component is replaceable if authorised by the test house
- C - Integrated component tested together with the appliance
- D - Alternative component

EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2	TABLE: Thermal tests of Section 12		P
	Type reference	VT-814	–
	Lamp used..... :	Non-user replaceable LED module	–
	Lamp control gear used	--	–
	Mounting position of luminaire	Normal used	–
	Supply wattage (W)	10,1	–
	Supply current (A)	0,05	–
	Temperatures in test 1 - 4 below are corrected for ta (°C)	25	–
	- abnormal operating mode	–	–
1.13 (12.4)	- test 1: rated voltage	–	–
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,1 x 240 VAC = 264 VAC	–
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	–	–
	Through wiring or looping-in wiring loaded by a current of A during the test	–	–
1.13 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current or 130/150% of rated input voltage		–

Temperature measurements (°C)

Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
LED PCB	25	–	73.2	–	130	–	–
Diffuser	25	–	40.9	–	Ref.	–	–
LED PCB wire	25	–	58.1	–	80	–	–
Tc	25	–	65.1	–	85	–	–
Lighted objects (0.1m)	25	–	25.4	–	90		

Supplementary information: --

ANNEX 3	Screw terminals (part of the luminaire)	N/A
(14)	SCREW TERMINALS	N/A


EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
ANNEX 4	Screwless terminals (part of the luminaire)		N/A
(15)	SCREWLESS TERMINALS		N/A
Annex 5	IEC 60598-1: 2014+A1: 2017		P
	The deviation between IEC 60598-1: 2014+A1: 2017 and IEC 60598-1: 2020 were considered.	For the products covered in this report, the requirements of IEC 60598-1:2014+A1: 2017 was covered by IEC 60598-1: 2020.	P
Annex 6	IEC 60598-2-1: 1979+A1: 1987		P
	The deviation between IEC 60598-2-1: 1979+A1: 1987 and IEC 60598-2-1: 2020 were considered.	For the product covered in this report, the requirements of IEC 60598-2-1: 1979+A1: 1987 was covered by IEC 60598-2-1: 2020.	P
Annex 7	EMF		P
	The Tested product also complies to the requirements of EN 62493: 2015 and BS EN 62493: 2015		P
Annex 8	Additional requirement of LED modules had been considered according to IEC 62031: 2018; EN IEC 62031: 2020 and BS EN IEC 62031: 2020		P
12 (14)	FAULT CONDITIONS		P
- (14.1)	When operated under fault conditions the controlgear:		P
	- does not emit flames or molten material		N/A
	- does not produce flammable gases		N/A
	- protection against accidental contact not impaired		N/A
	Thermally protected controlgear does not exceed the marked temperature value		N/A
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected	(see appended table)	N/A
- (14.2)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (after any reduction in 14.2 - 14.5)	(see appended table)	N/A

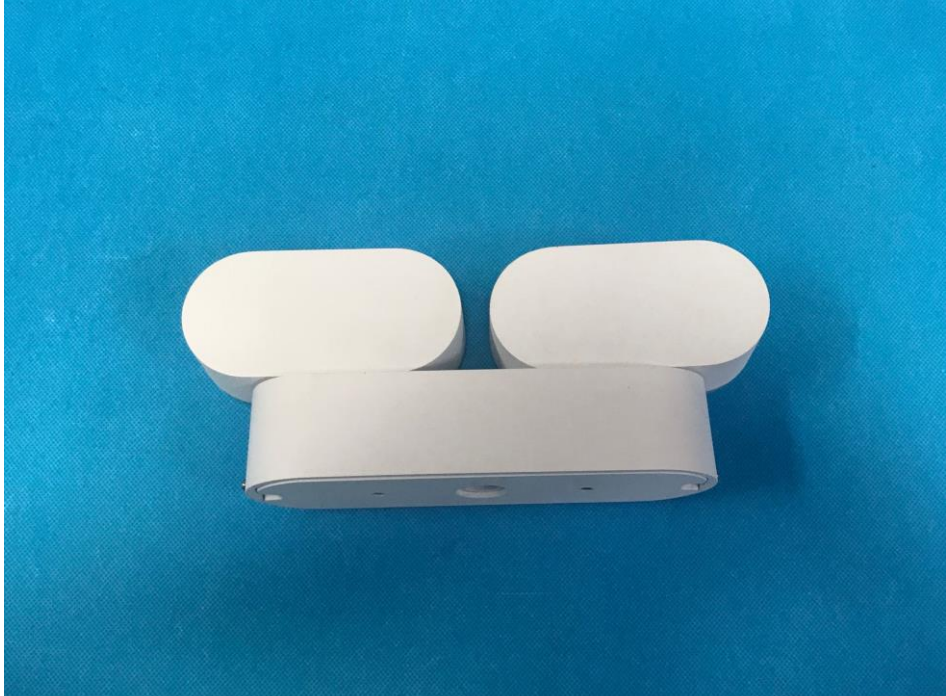


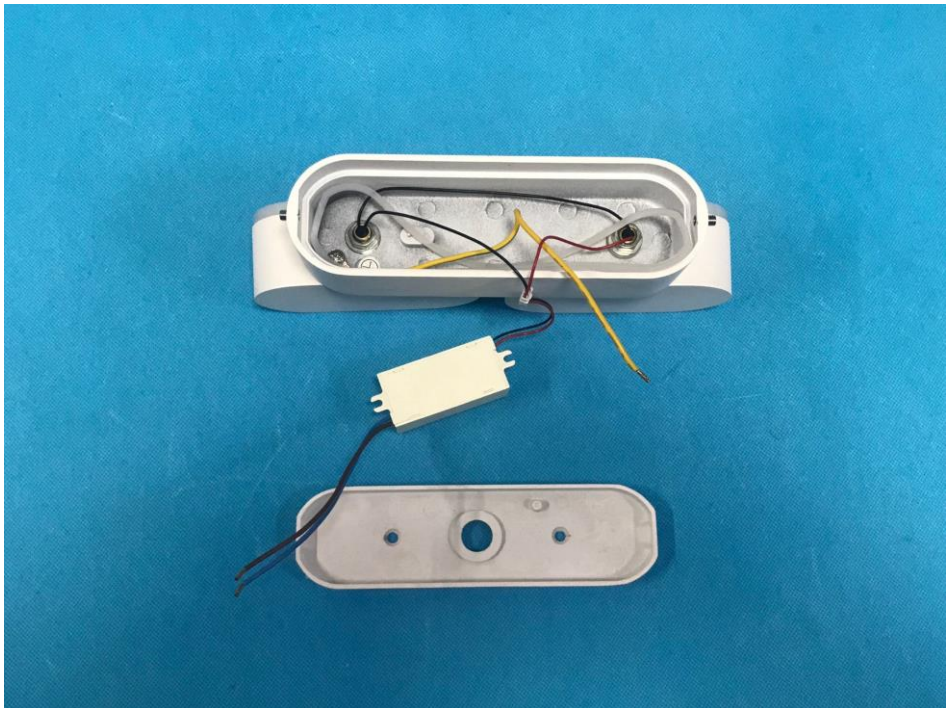
EN 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
- (14.3)	Short-circuit or interruption of semiconductor devices	(see appended table)	P
- (14.4)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	N/A
- (14.5)	Short-circuit across electrolytic capacitors	(see appended table)	N/A
	Short-circuit or interruption of SPDs	(see appended table)	N/A
- (14.6)	After the tests has been carried out on three samples:		N/A
	The insulation resistance $\geq 1 \text{ M}\Omega$		N/A
	No flammable gases		N/A
	No accessible parts have become live		N/A
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		N/A
- (14.7)	Relevant fault condition tests with high-power a.c. supply and in turn to a d.c. supply		-
12.2	Overpower condition		P
	Module withstands overpower condition >15 min.		P
	Module with automatic protective device or power limiter, test performed 15 min. at limit.		N/A
	No fire, smoke or flammable gas is produced		P
	Molten material does not ignite tissue paper, spread below the module		P

Appendix 1

Photo documentation

<p>Photo 1</p> <p>View:</p> <p><input checked="" type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input type="checkbox"/> Internal</p>	 <p>A photograph showing the front view of a white, oval-shaped electronic device. The device has a smooth, rounded top and a slightly recessed bottom. A ruler is placed below the device for scale, indicating its length is approximately 10 cm. The background is a solid blue color.</p>
--	--

<p>Photo 2</p> <p>View:</p> <p><input type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input checked="" type="checkbox"/> Internal</p>	 <p>A photograph showing the internal view of the white, oval-shaped electronic device. The device is shown from a perspective that reveals its internal components, which are not clearly visible. The background is a solid blue color.</p>
--	---

<p>Photo 3</p> <p>View:</p> <p><input type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input checked="" type="checkbox"/> Internal</p>	
--	---

<p>Photo 4</p> <p>View:</p> <p><input type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input checked="" type="checkbox"/> Internal</p>	
--	--



---END---